



ENERG
енергия · ενεργεια



NIBE

AMS10-8 + BA-SVM10-200/12 R



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

A⁺⁺

A⁺

A

B

C

D

E

F

A



35 dB



55 dB



■ 10 kW


■ **07 kW**

■ 08 kW






ENERG

енергия · ενεργεια



NIBE

AMS10-8 + BA-SVM10-200/12 R

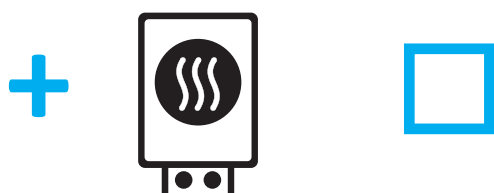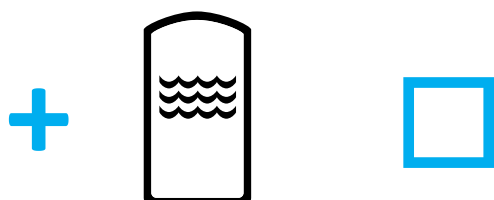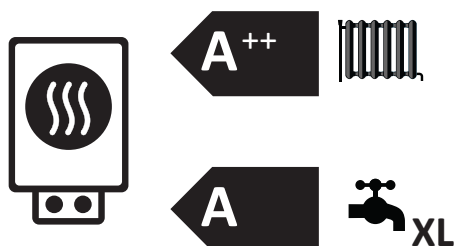

Supplier's name:	NIBE		
Model:	AMS10-8 + BA-SVM10-200/12 R		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	8,2	7,0	kW
Annual energy consumption for space heating, average climate	3882	4447	kWh
Annual electricity consumption for water heating, average climate	1689		kWh
Seasonal space heating energy efficiency, average climate:	172	127	%
Water heating energy efficiency, average climate:	99		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	9,0	10,0	kW
Rated heat output, warm climate:	8,0	8,0	kW
Annual energy consumption for space heating, cold climate	6264	8844	kWh
Annual electricity consumption for water heating, cold climate	1886		kWh
Annual energy consumption for space heating, warm climate	1879	2333	kWh
Annual electricity consumption for water heating, warm climate	1540		kWh
Seasonal space heating energy efficiency, cold climate:	139	108	%
Water heating energy efficiency, cold climate:	89		%
Seasonal space heating energy efficiency, warm climate:	225	180	%
Water heating energy efficiency, warm climate:	109		%
Sound power level LWA outdoors	55		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	176	131	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	143	112	%
Seasonal space heating energy efficiency of package, warm climate:	229	184	%

Model(s):		AMS10-8 + BA-SVM10-200/12 R							
Type of heat source/sink:		Air-to-water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN14825, EN16147									
Rated heat output		Prated	7,0	kW	Seasonal space heating energy efficiency		ηs	127	%
Declared capacity for part load at outdoor temperature Tj					Declared coefficient of performance for part load at outdoor temperature Tj				
Tj = -7 °C	Pdh	6,3	kW	Tj = -7 °C	COPd	1,94	-		
Tj = +2 °C	Pdh	3,9	kW	Tj = +2 °C	COPd	3,11	-		
Tj = +7 °C	Pdh	2,6	kW	Tj = +7 °C	COPd	4,42	-		
Tj = +12 °C	Pdh	3,7	kW	Tj = +12 °C	COPd	5,93	-		
Tj = biv	Pdh	6,6	kW	Tj = biv	COPd	1,83	-		
Tj = TOL	Pdh	5,9	kW	Tj = TOL	COPd	1,86	-		
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-		
Bivalent temperature	Tbiv	-8,6	°C	Operation limit temperature	TOL	-10	°C		
Cycling interval capacity for heating	Pcyh		kW	Cycling interval efficiency	COPcyh		-		
Degradation co-efficient	Cdh	0,97	-	Heating water operating limit	WTOL	58	°C		
Power consumption in modes other than active mode					Supplementary heater				
Off mode	P _{OFF}	0,002	kW	Rated heat output	P _{sup}	1,1	kW		
Thermostat-off mode	P _{TO}	0,01	kW						
Standby mode	P _{SB}	0,015	kW	Type of energy input	Electric				
Crankcase heater mode	P _{CK}	0,03	kW						
Other items									
Capacity control	variable			Rated air flow rate, outdoors		3000	m³/h		
Sound power level, indoors/outdoors	L _{WA}	35/55	dB	Rated water flow rate, indoor heat exchanger		0,60	m³/h		
Annual energy consumption	Q _{HE}	4447	kWh	Rated brine or water flow rate, outdoor heat exchanger			m³/h		
For heat pump combination heater:									
Declared load profile		XL		Water heating energy efficiency		η _{wh}	99	%	
Daily electricity consumption	Q _{elec}	7,69	kWh	Daily fuel consumption	Q _{fuel}		kWh		
Annual electricity consumption	AEC	1689	kWh	Annual fuel consumption	AFC		GJ		
Approved by:									
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							




ENERG

енергия · ενεργεια




NIBE

AMS10-12 + BA-SVM10-200/12 R

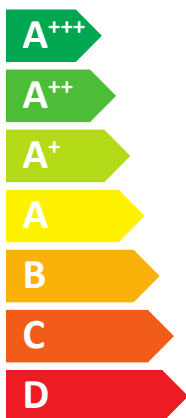

A++

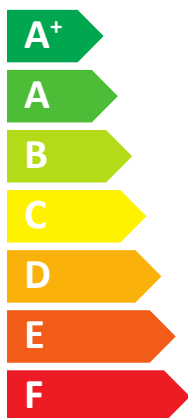

A



35 dB



58 dB




- 13 kW
- 10 kW
- 12 kW






ENERG

енергия · ενεργεια



NIBE

AMS10-12 + BA-SVM10-200/12 R

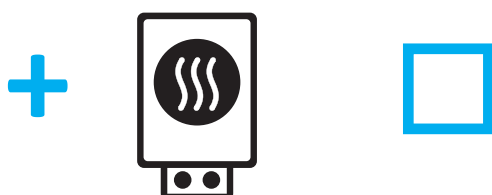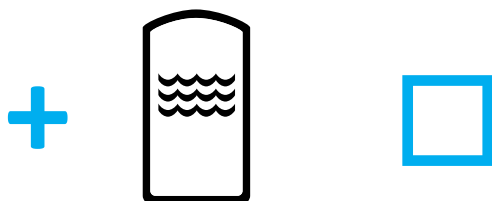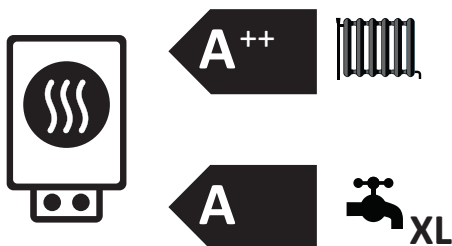

Supplier's name:	NIBE		
Model:	AMS10-12 + BA-SVM10-200/12 R		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	11,5	10,0	kW
Annual energy consumption for space heating, average climate	5382	6136	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7798	11197	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3419	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	142	111	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	185	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	58		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

Model(s):		AMS10-12 + BA-SVM10-200/12 R							
Type of heat source/sink:		Air-to-water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN14825, EN16147									
Rated heat output		Prated	10,0	kW	Seasonal space heating energy efficiency		ηs	132	%
Declared capacity for part load at outdoor temperature Tj					Declared coefficient of performance for part load at outdoor temperature Tj				
Tj = -7 °C	Pdh	8,9	kW	Tj = -7 °C	COPd	1,99	-		
Tj = +2 °C	Pdh	5,5	kW	Tj = +2 °C	COPd	3,22	-		
Tj = +7 °C	Pdh	3,5	kW	Tj = +7 °C	COPd	4,61	-		
Tj = +12 °C	Pdh	5,0	kW	Tj = +12 °C	COPd	6,25	-		
Tj = biv	Pdh	9,2	kW	Tj = biv	COPd	1,90	-		
Tj = TOL	Pdh	8,1	kW	Tj = TOL	COPd	1,92	-		
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-		
Bivalent temperature	Tbiv	-7,9	°C	Operation limit temperature	TOL	-10	°C		
Cycling interval capacity for heating	Pcyc		kW	Cycling interval efficiency	COPcyc		-		
Degradation co-efficient	Cdh	0,98	-	Heating water operating limit	WTOL	58	°C		
Power consumption in modes other than active mode					Supplementary heater				
Off mode	P _{OFF}	0,002	kW	Rated heat output	P _{sup}	1,9	kW		
Thermostat-off mode	P _{TO}	0,014	kW						
Standby mode	P _{SB}	0,015	kW	Type of energy input	Electric				
Crankcase heater mode	P _{CK}	0,035	kW						
Other items									
Capacity control	variable			Rated air flow rate, outdoors		4380	m³/h		
Sound power level, indoors/outdoors	L _{WA}	35/58	dB	Rated water flow rate, indoor heat exchanger		0,86	m³/h		
Annual energy consumption	Q _{HE}	6136	kWh	Rated brine or water flow rate, outdoor heat exchanger			m³/h		
For heat pump combination heater:									
Declared load profile		XL		Water heating energy efficiency		η _{wh}	98	%	
Daily electricity consumption	Q _{elec}	7,75	kWh	Daily fuel consumption	Q _{fuel}		kWh		
Annual electricity consumption	AEC	1702	kWh	Annual fuel consumption	AFC		GJ		
Approved by:									
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							